


King AcraSensor II Diaphragm Units
MODELS 7999-11-3 THRU 7999-18-3
(EXTERNAL MOUNTING)

MODEL NO.	MATES WITH
7999-11-3	TRI-CLOVER MP-2"
7999-12-3	CHERRY BURRELL 15RI-2"
7999-13-3	2" BEVEL SEAT (NOTE 7)
7999-14-3	G & H GH-14-2"
7999-15-3	CHERRY BURRELL 14RQ-2"
7999-16-3	THOMSEN T 14-2"
7999-17-3	CREPACO AND/OR ALLOY PRODUCTS K-14-2"
7999-18-3	CHERRY BURRELL 14RI-2"

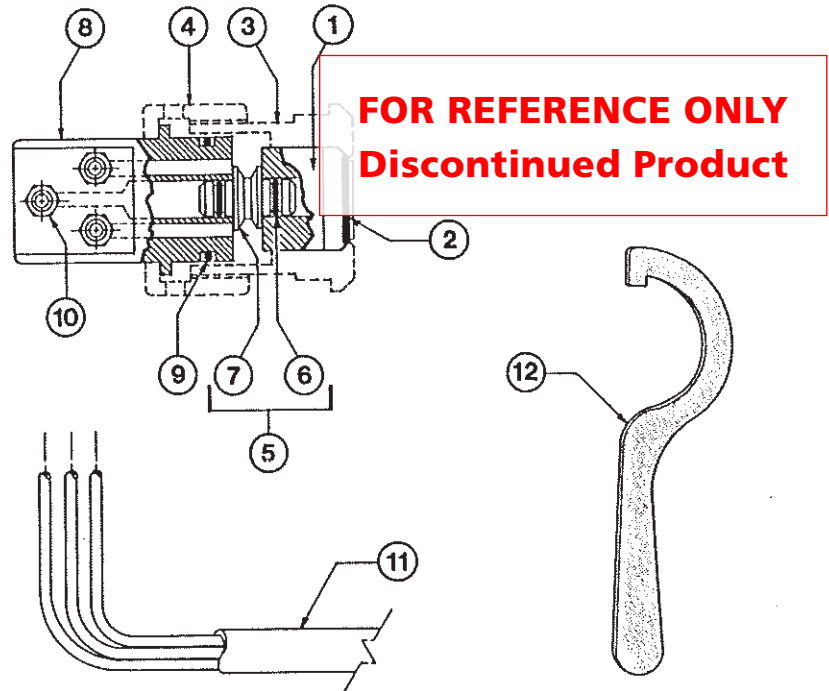

ITEM	DESCRIPTION	PART NO.	NOTES (SEE REVERSE SIDE)
1	METAL SENSING DIAPHRAGM	7904-1	1
2	O-RING	6554-30-1	1
3	SHELL	--	2
4	ACRASENSOR NUT	1751	--
5	POST ASSEMBLY	7859-1	3
6	O-RING (2 REQUIRED)	6495-7	3
7	SPRING WASHER (2 REQUIRED)	3038	3
8	CONNECTOR ASSEMBLY	1752-22-3	4
9	O-RING	6495-24	4
10	POLYFLO FITTING (1/8 NPT x 1/4" O.D. TUBE)	1543-1	4
11	3-TUBE CABLE (15 FT. LENGTH)	1766-15	5
	3-TUBE CABLE (OVER 15 FT. LENGTH)	8014-XX	5
12	SPANNER WRENCH	7881	6

NOTES

1. Sensing Diaphragm #7904-1 (Item 1) includes O-ring (Item 2).
2. Shell (Item 3), for mating to ferrule at tank, is not available as a separate item.
3. Post Assembly #7859-1 (Item 5) includes O-rings (Item 6) and spring washers (Item 7).
4. Replacement Connector #1752-22-3 (Item 8) includes O-ring (Item 9) and fittings (Item 10).
5. 3-tube cable (Item 11) is available in standard 15 ft. length (#1766-15). For lengths over 15 feet, order #8014-* and specify total length (in feet) required -- dash no. represents number of feet specified.

Example: 20 feet of cable -- order #8014-20

6. Spanner wrench (Item 12) is shipped with new diaphragm units. If additional wrenches are desired, order #7881. It is used to tighten the AcraSensor Nut, which is provided with torque ports to accomodate the wrench.
7. Model 7999-13-3 mates with 2" bevel seat fitting series 15-2" and includes the sanitary nut as part of the unit.